


DS-2CD7133-E VGA Real-time CMOS Mini Vandal-proof Network Indoor Dome Camera



- Real time video display at VGA(640×480)
- Adopt advanced video compression with high compression ratio
- Support PoE power supply



Unit: mm

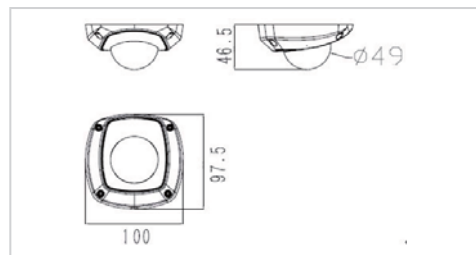

Specifications

		DS-2CD7133-E
Camera	Image Sensor	1/4 inch CMOS
	Effective Pixels	640 (H) × 480 (V)
	Min. Illumination	Color: 0.1 Lux @ F1.2; B/W: 0.01Lux @ F1.2
	Electronic Shutter	1/25s ~1/100,000s
	Day&Night	Electronic
	Lens	4mm, F1.2 Fixed Iris(2.8, 6, 8mm optional)
	Angle of view	71°
	Video Parameter	Saturation/Brightness/Contrast/Tue adjustable through client software or web browser
Compression Standard	Adjustment Range	Pan±15°, Tilt0~90°, Rotation±15°
	Video Compression	H.264/Mpeg4/Mjpeg
	Video Bit Rate	32 Kbps~8Mbps
Image	Audio Compression	OggVorbis
	Max. Image Resolution	640×480
Functions	Frame Rate	30fps @ 640×480
	Storage	Support NAS, iSCSI
	Intelligent Alarm	Motion Detection, Video Tampering, Video Loss, Network Broken, IP address conflict, Storage exception
	Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTCP, PPPoE, FTP, SMTP, NTP, SNMP, HTTPS, SIP, 802.1x, IPV6
	Basic	Initial Set button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, watermark
Interface	3-Axis adjustment	Yes
	Audio	Internal Microphone optional
	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet port
General	Power Supply	DC12V±10% / PoE
	Power Consumption	3W MAX
	Working Temperature	-10°C ~ 60°C
	Working Humidity	90% or less
	Impact Protection	IEC60068-2-75Eh,50J;EN50102, exceeding IK10
	Weather Proof	IP66
	Dimensions(mm)	100×97.5×46.5
Weight	250g	

Available Models

DS-2CD7133-E