




## 120-6432

### GPROX-III MULLION ARM STN RDR

#### Overview

G-Prox™ III Readers have the unique ability to read standard G-Prox I cards and G-Prox II cards concurrently. G-Prox III readers are available in 3 models – Mini, Mullion and Switchplate. The Mullion and Switchplate models are also available with integrated touch keypad. These keypad readers are vandal resistant and support PIN, card, and card+PIN modes. When used with Verex door controllers, keypad readers also support all arming station functions.

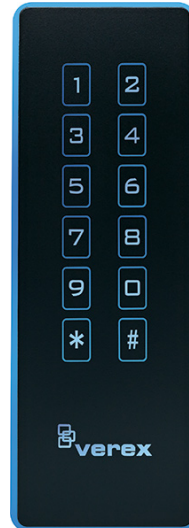

#### Standard Features

- Support G-Prox I (HID®) and standard G-Prox II tokens concurrently
- Support G-Prox I (HID®) and standard G-Prox II tokens concurrently
- Support G-Prox I (HID®) and standard G-Prox II tokens concurrently
- Support G-Prox I and G-Prox II concurrently
- Mini, Mullion and Switchplate models
- Mullion and Switchplate models available as arming station with integrated touch PIN pad
- Keypad readers support Card, PIN and Card + PIN modes

# 120-6432

## GPROX-III MULLION ARM STN RDR

### Specifications

Available modes	PIN, Card, Card +PIN
Wiegand output	Up to 40 bits
Maximum read range	50mm-125mm
Cable distance	150m
Transmit frequency	125 kHz
Power supply	12 VDC
Mounting	Surface
Current rating	< 100 mA (typical)
Dimensions	150 x 53 x 25mm
Temperature	-35° C to 66° C
Audible feedback	Yes
Manual door unlock control	Yes
LED indication	Yes
Touch PIN keypad	Yes
Disarm intrusion to OFF	Yes
Disarm intrusion to STAY	Yes
Arm to ON Supported	Yes
Colour	Black

### Ordering Information

Part No.	Description
120-6432	GPROX-III MULLION ARM STN RDR
120-6430	GPROX III SWITCHPLATE ARMING STATION READER
120-6431	GPROX-III SWITCHPLATE READER
120-6433	GPROX III MULLION READER
120-6434	GPROX-III MINI SWITCHPLATE RDR

